



# HQS-19.2W-120LED-WW2K7W-24V

Professional Led Strip, 19.2 W/m




## TECHNICAL DETAILS


SUPPLY VOLTAGE	24 V ± 0.5 VDC
POWER	19.2 W/m
CURRENT	0.8 A/m
POWER PER REEL (5M)	96 W
COLOR TEMPERATURE	2700 - 6500K
BEAM ANGLE	180°
LUMINOUS FLUX PER METER	1960 lm
CRI	80
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP33
WORKING TEMPERATURE	-20°C ~ 50°C
STORAGE TEMPERATURE	-25°C ~ 60°C
LED QTY (PER METER)	120 LEDs/m
WIDTH PCB	10 mm
CUT SECTION	50 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm <sup>2</sup> ) stranded wire, length = 360 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5004 x 10 x 1.3 mm
PACKING	5 m /roll (bag); 50 pcs / ctn; ctn dimensions: 45 x 45 x 26.5 cm

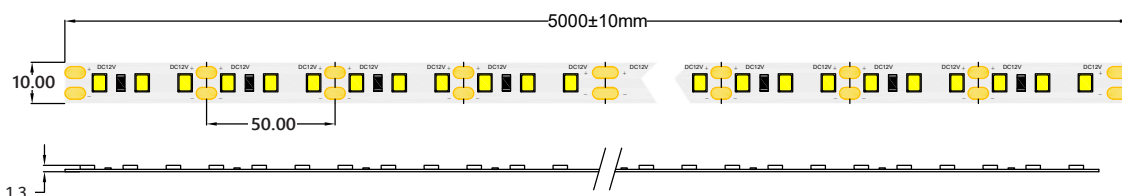


CONNECTORS PCB Width 10 mm

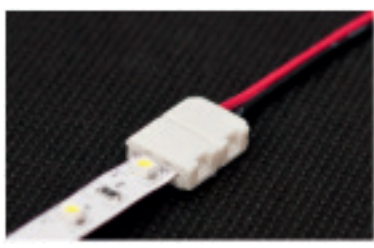

CLICK-10A



CLICK-10B



CLICK-10C

**ENERGY**  
MW LIGHTING  
HQS-19.2W-120LED-WW2K7W-24V

A  
B  
C  
D  
E  
F  
G

**F**

**10**  
kWh/1000h

2019/2015