



HQS-9.6W-120LED-NW-WP-12V

Professional Led Strip, 9.6 W/m

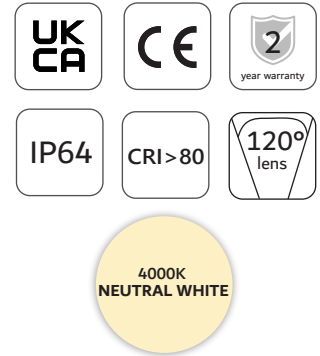

TECHNICAL DETAILS

| | |
|-------------------------------------|---|
| SUPPLY VOLTAGE | 12 V ± 0.5 VDC |
| POWER | 9.6 W/m |
| CURRENT | 0.8 A/m |
| POWER PER REEL (5M) | 48 W |
| COLOR TEMPERATURE | 4000K |
| BEAM ANGLE | 120° |
| LUMINOUS FLUX PER METER | 1040 lm |
| CRI | 80 |
| MAXIMUM LENGTH FOR ONE SIDED SUPPLY | 5 m |
| IP PROTECTION DEGREE | IP64 |
| WORKING TEMPERATURE | -25°C ~ 50°C |
| STORAGE TEMPERATURE | -25°C ~ 60°C |
| LED QTY (PER METER) | 120 LEDs/m |
| WIDTH PCB | 8 mm |
| CUT SECTION | 25 mm |
| CONNECTION WIRE | 2 x AWG20 (0.52 mm ²) stranded wire, length = 140 mm: V+: red: V:-black |
| DIMENSIONS (L * W * H) | 5000 x 8 x 1.26 mm |
| PACKING | 5 m /roll (bag); 60 pcs / ctn; ctn dimensions: 45 x 25 x 25.6 cm |

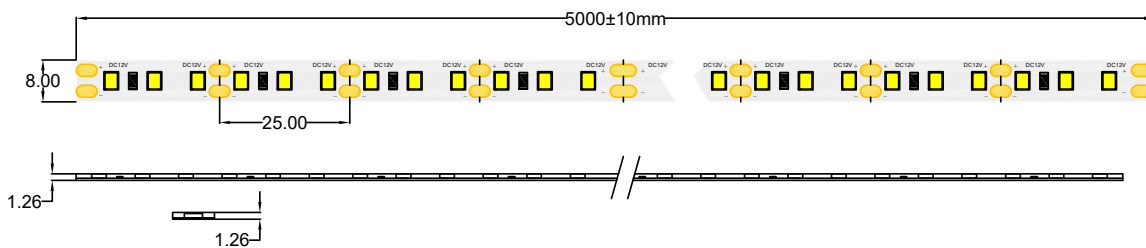


CONNECTORS PCB Width 8 mm



CLICK-8A-WP



CLICK-8B-WP



CLICK-8C-WP



MW LIGHTING
HQS-9.6W-120LED-NW-WP-12V



5
kWh/1000h



2019/2015